



Hingham Waterfront Resiliency Project

Hingham, MA

A presentation to: Hingham
Conservation Commission

In Partnership With:

Sustainable Coastal Solutions, Inc.

May 18, 2026


Hingham Waterfront Resiliency Project

- ◆ Project Overview
 - NOI 1A – Bathing Beach & Boat Ramp Parking Lot Resiliency Improvements
 - NOI 1B – Beach Management Plan
 - NOI 1C – “Sliver” (interface between Town resiliency & Route 3A improvements)
 - NOI 2 – Town Wharf
 - NOI 3 – Barnes Wharf
- ◆ Anticipated Permitting & Schedule

Project Location



Vicinity Map

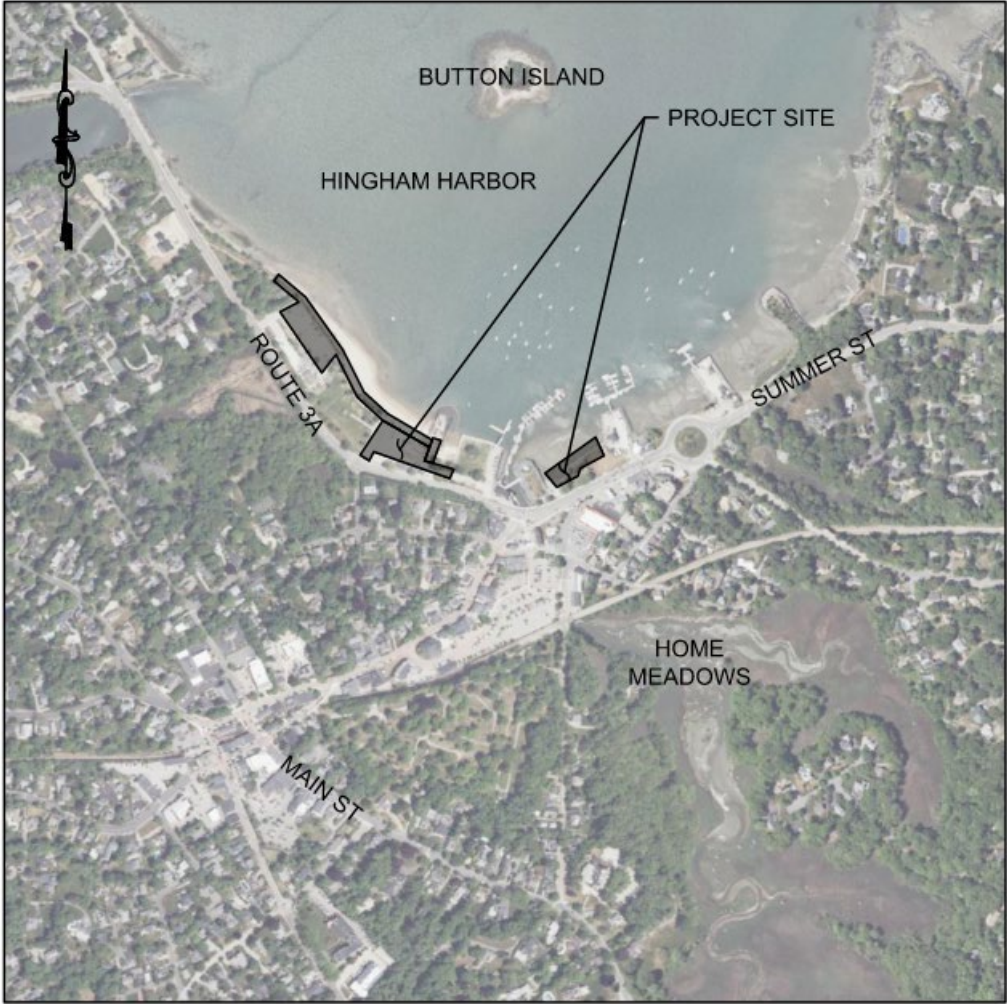

Location Map

Existing Conditions



Existing Conditions




Existing Conditions



Existing Conditions





Existing Conditions

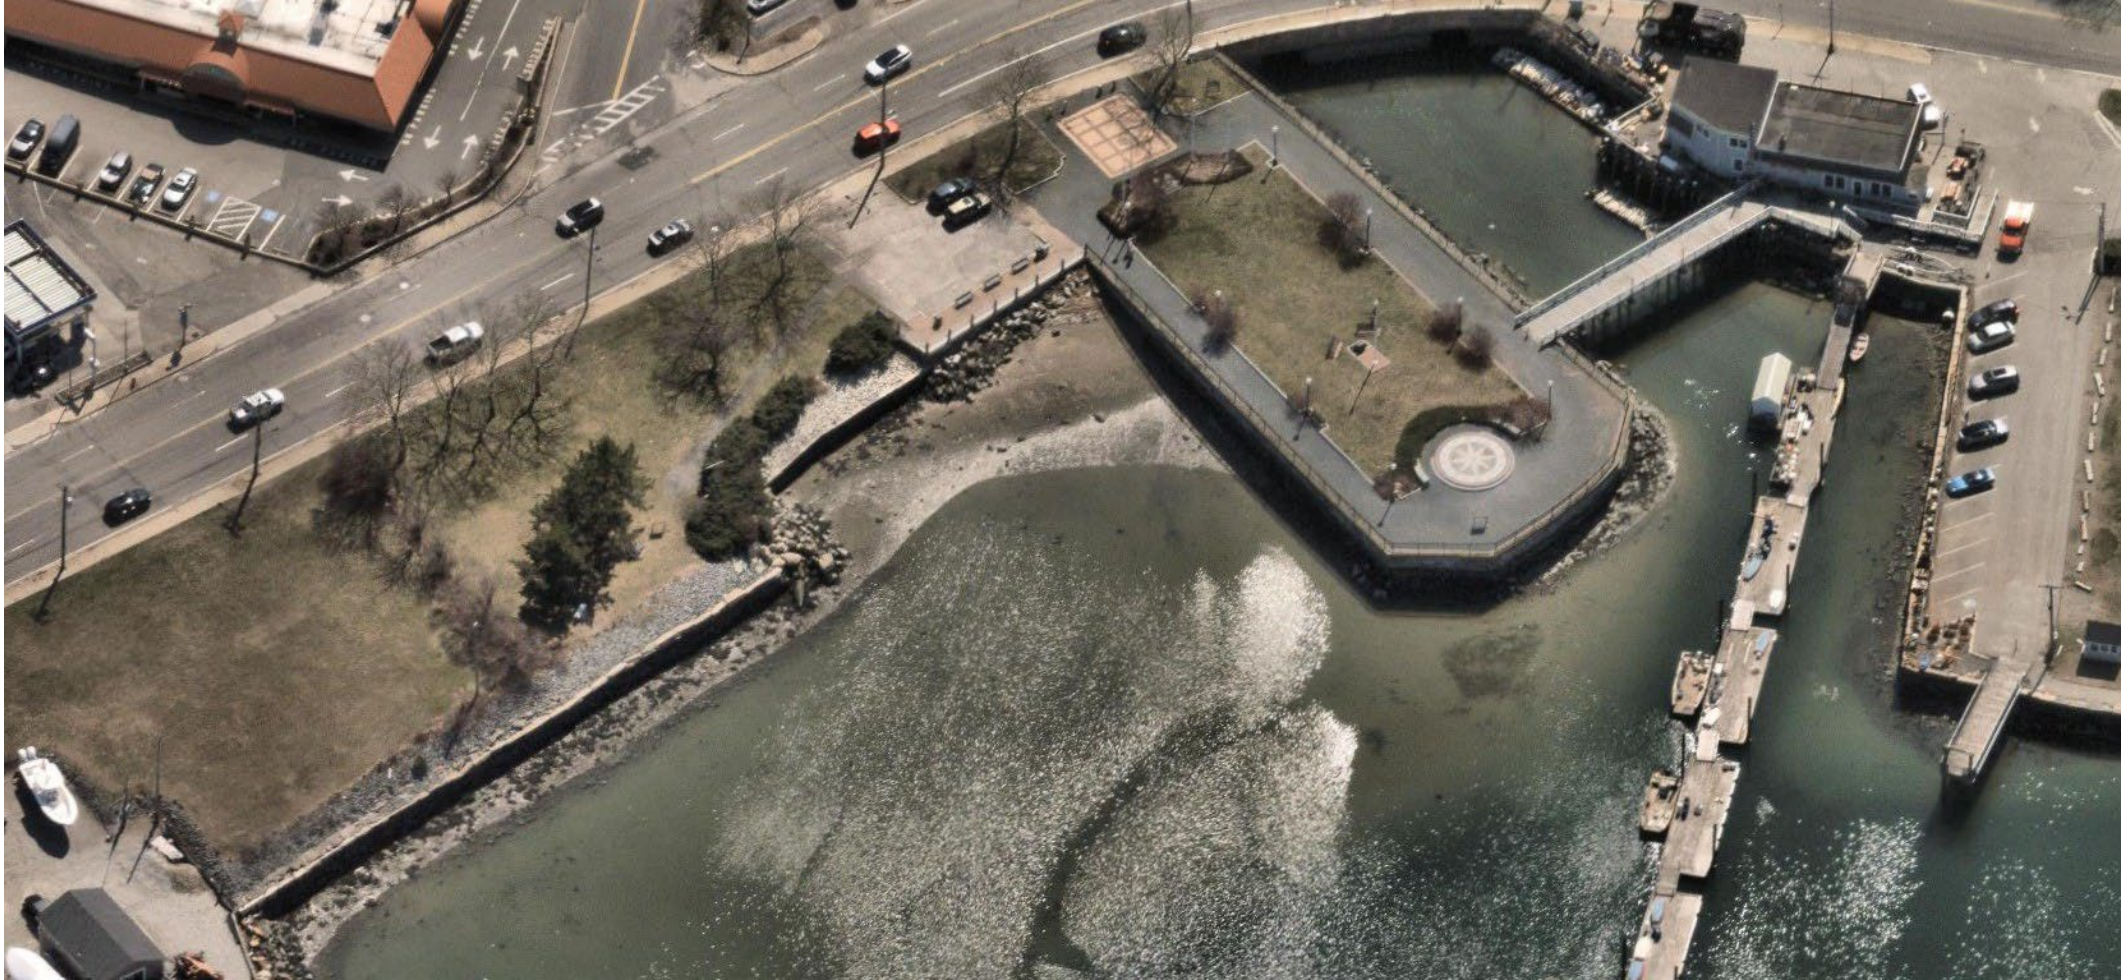


Proposed Site Improvements – NOI 1A

- ◆ Elevation of Bathing Beach & Boat Ramp parking lots;
 - Min. Resiliency Elevation = 11.5' NAVD88
- ◆ Construction of Coastal Dune;
- ◆ POW/MIA Park Revetment Construction;
- ◆ Resiliency riser on culvert grate to achieve minimum flood protection.

Proposed Conditions – NOI 1A

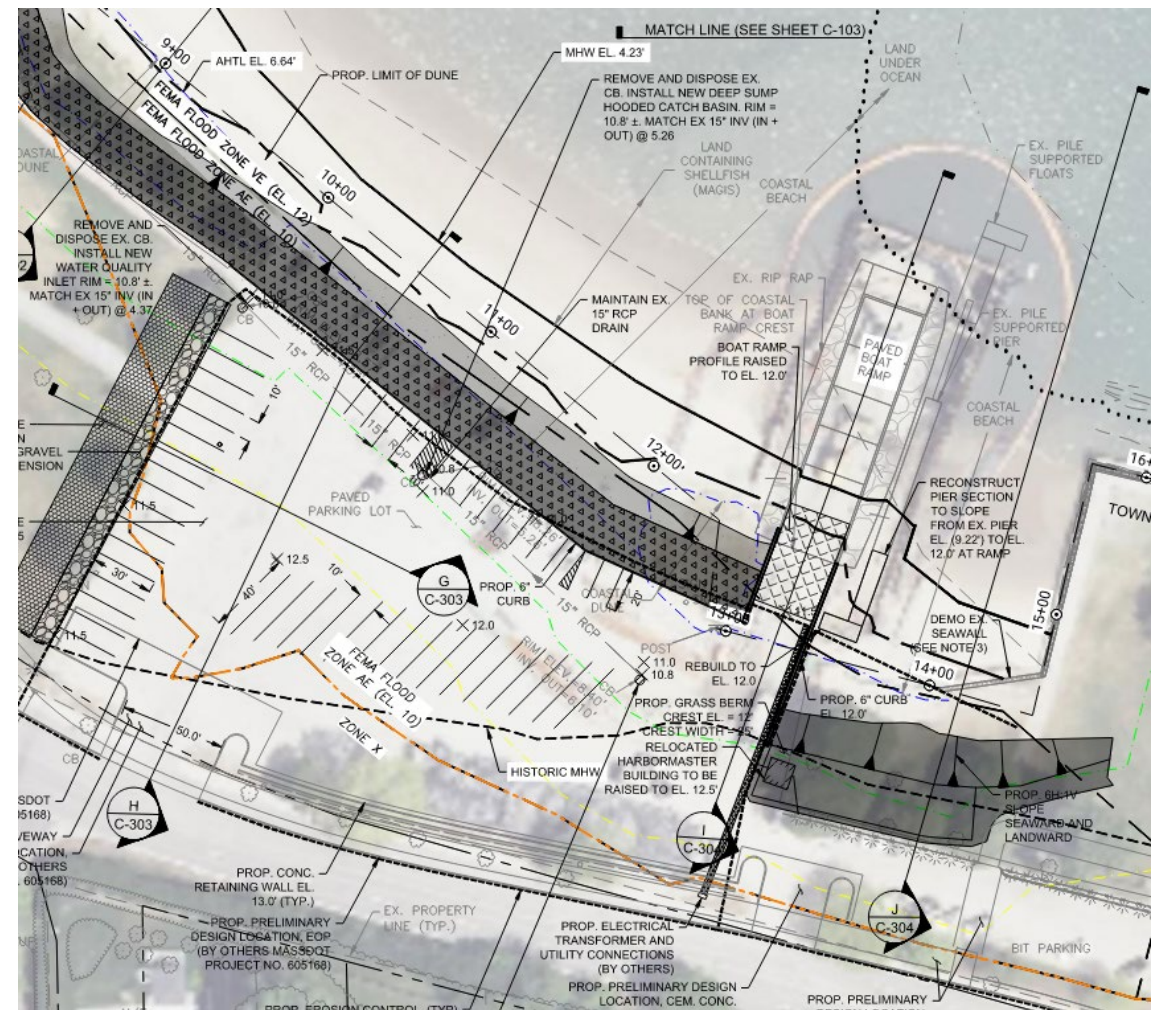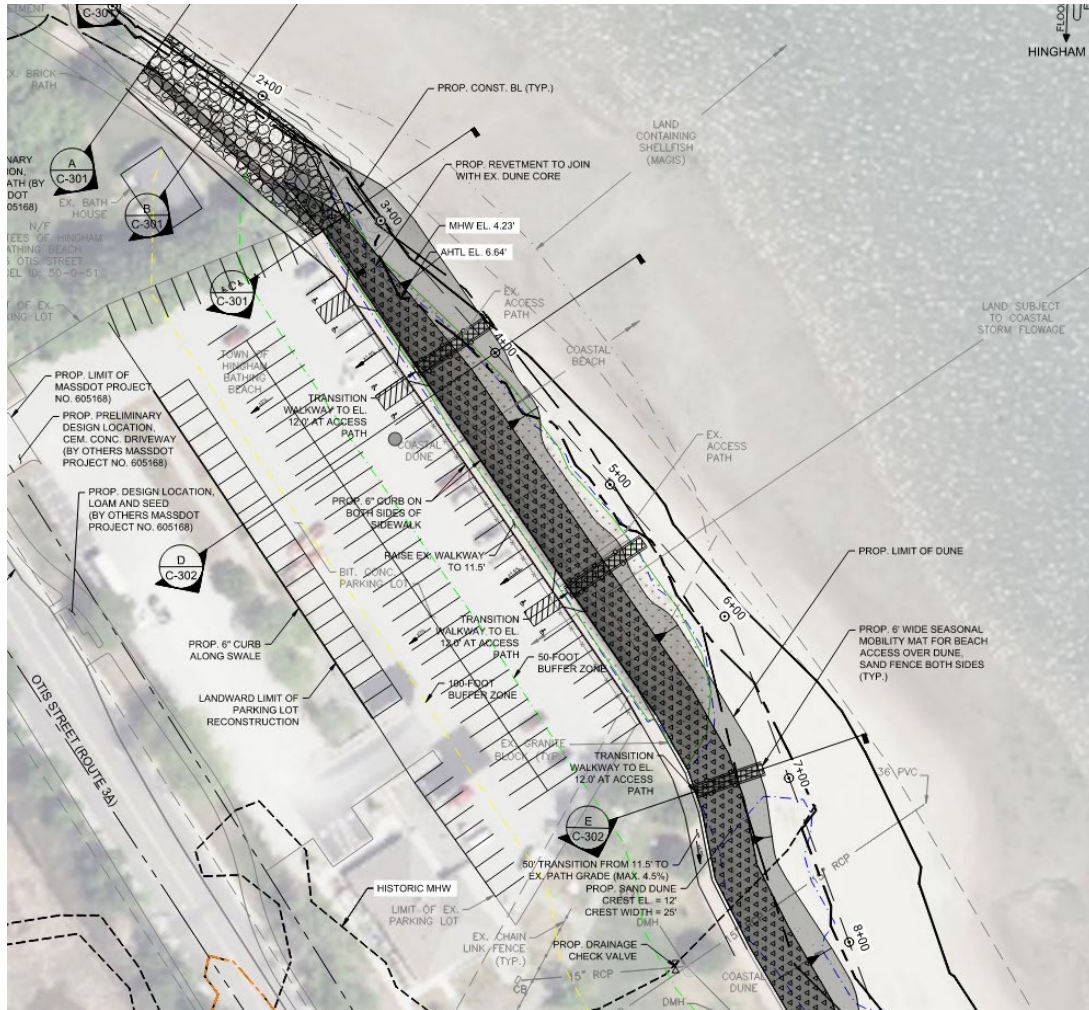


Proposed Conditions – NOI 1A

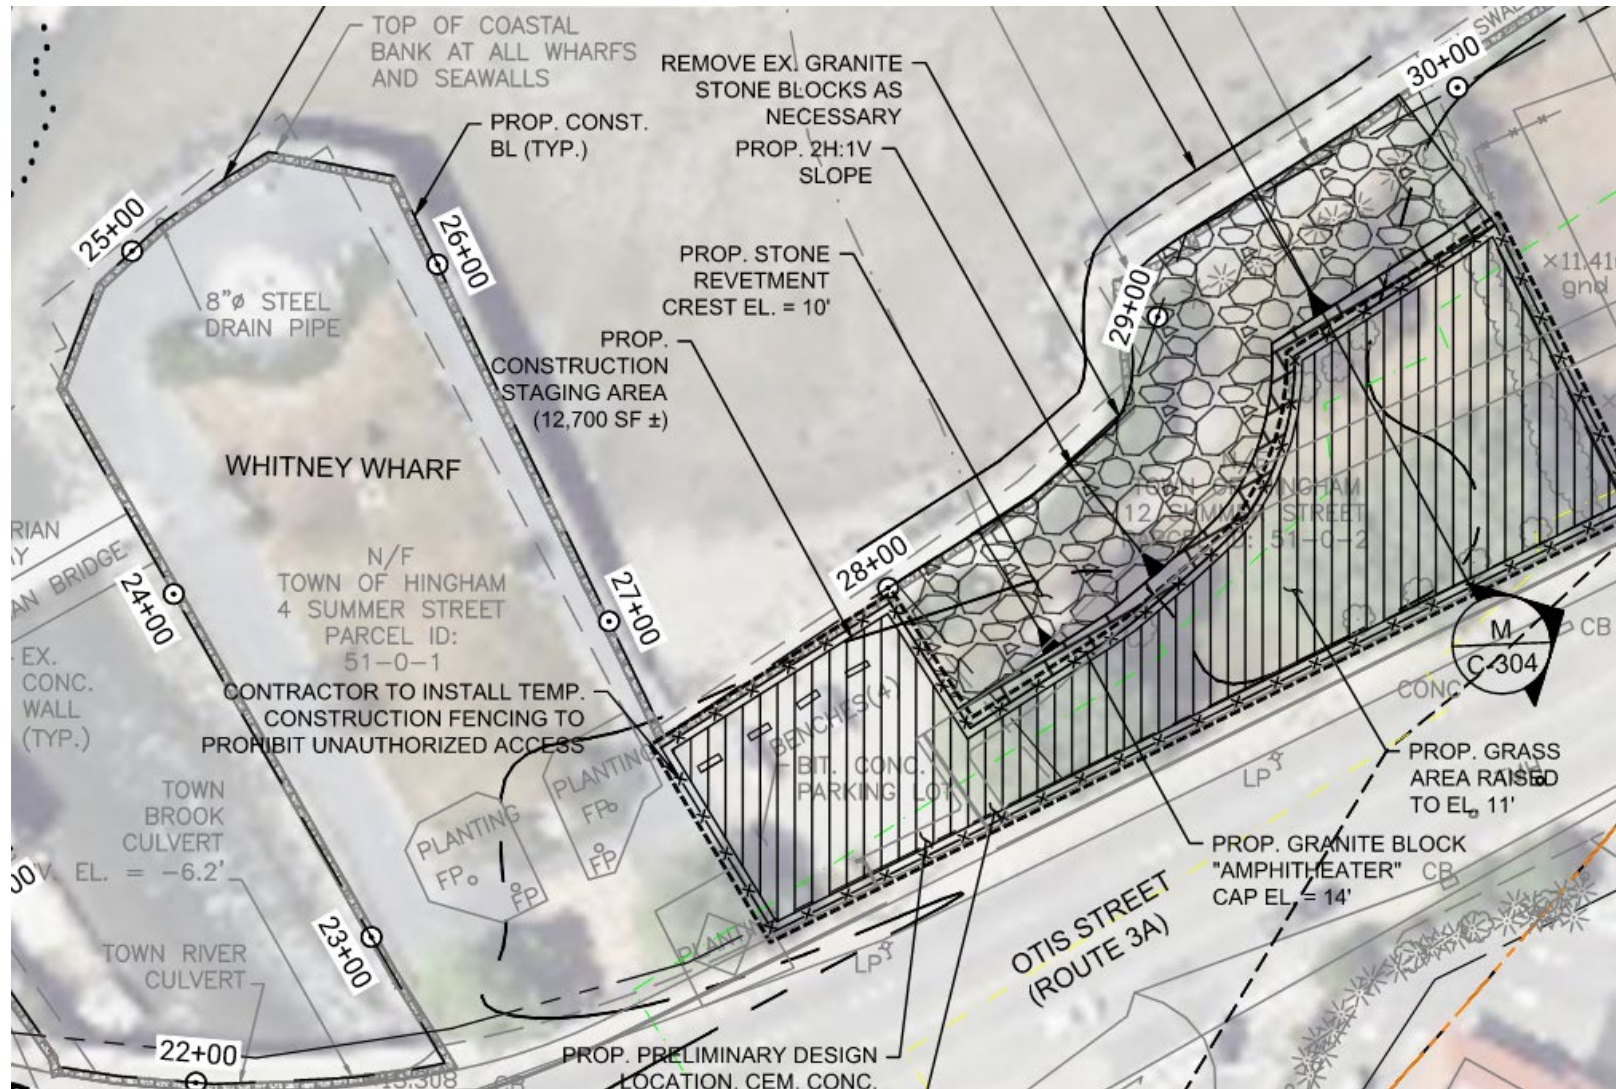


Proposed Site Improvements – NOI 1B

- ◆ Beach Management Plan
 - Town Boat Ramp Dredging
 - Upland placement of dredged material
 - Sand Raking
 - Dune maintenance

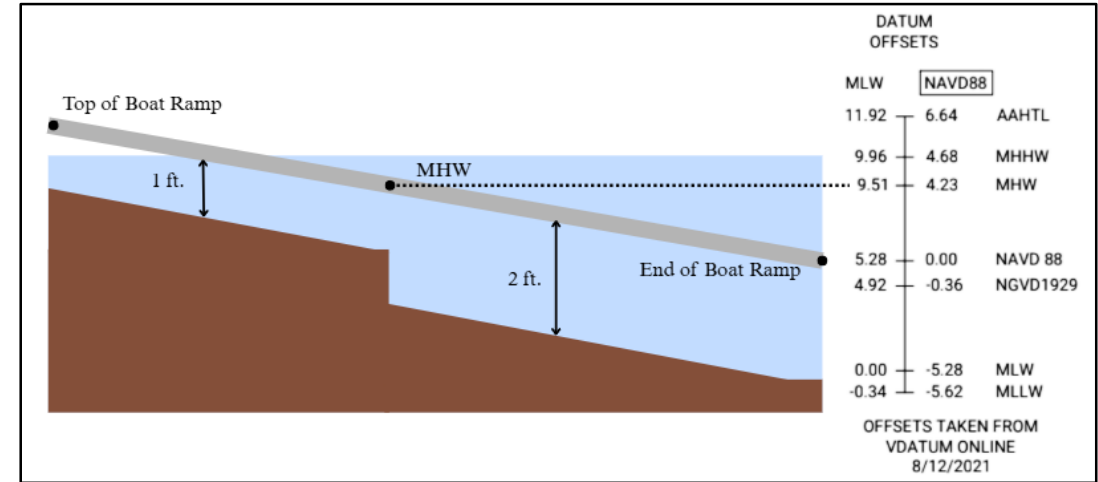


Proposed Site Improvements – NOI 1C

- ◆ “Sliver”- proposed improvements along Route 3A
 - Interface between Town resiliency work and MassDOT Route 3A Improvements;
 - Widen existing parking lot entrance driveway;
 - Temporary retaining walls / grades to phase adjacent construction projects & maintain site access/operations

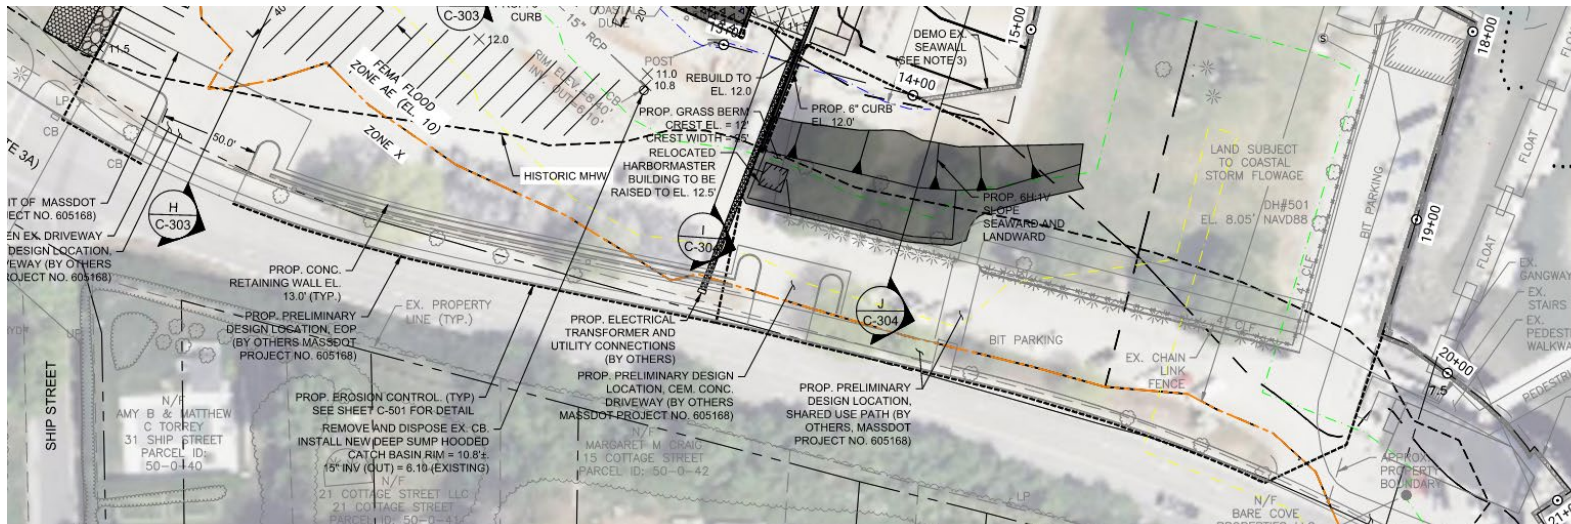


Proposed Site Improvements – NOI 2

- ◆ Town Wharf
 - Raise Wharf to El. +12' NAVD88;
 - Maintain granite façade;
 - Parking lot to be raised;
 - Existing pier to be raised & modified within existing footprint;
 - Proposed gangway installation;
 - Shared-use path along perimeter.

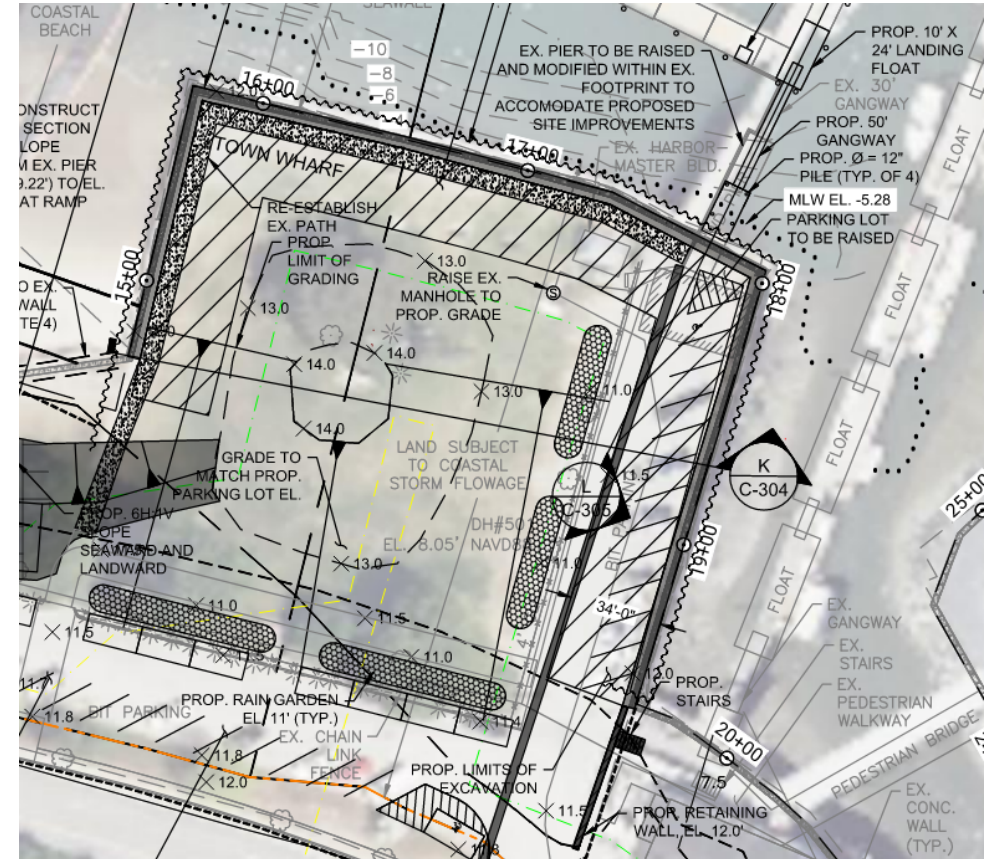

Proposed Site Improvements – NOI 3

- ◆ Barnes Wharf
 - Raise to El. +12' NAVD88;
 - Relocate existing Hingham Maritime Center rowing house & pavilion;
 - Proposed concrete/granite block seawall to cap. El. +12' NAVD88

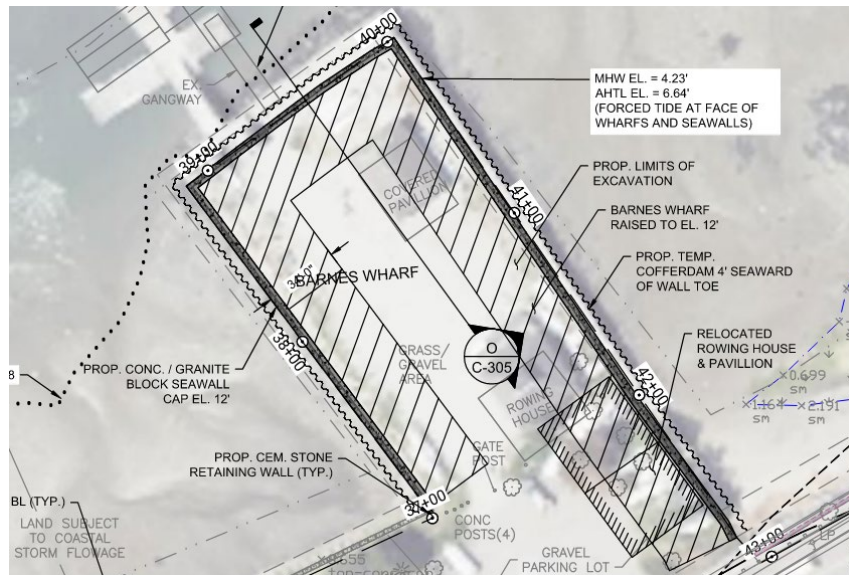

Anticipated Permitting & Schedule

- ◆ MEPA Review Complete (EEA #16464)
 - Secretary’s Certificate on EENF issued October 11, 2024
 - Secretary’s Certificate on NPC issued March 27, 2026
- ◆ NOI 1A- Anticipated Submission date of June 4, 2026
- ◆ Applications to be submitted (Spring-Summer 2026):

Agency	Permit / Approval
U.S. Army Corps of Engineers	Clean Water Act, Section 404 Pre-Construction Notification;
	Rivers and Harbors Act of 1899, Section 408 Permit (authorization to alter an existing civil works project)
Massachusetts Department of Environmental Protection (MassDEP)	M.G.L. Chapter 91 Waterways License and Permit;
	314 CMR 9.00: Section 401 Water Quality Certification
Massachusetts Office of Coastal Zone Management (CZM)	Coastal Zone Management Act Consistency Certification
Town of Hingham Conservation Commission (HCC)	Wetlands Protection Bylaw (Article 22) and Wetland Regulations Approval

Questions & Answers

